
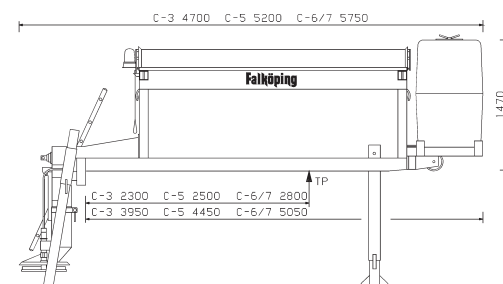


# SALT


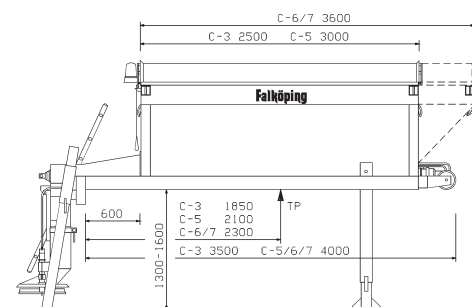


## Technical specifications C-3 C-5 C-6 C-7 Moistening

|                                                                        |                     |                |                |                |       |
|------------------------------------------------------------------------|---------------------|----------------|----------------|----------------|-------|
| Volume, m <sup>3</sup>                                                 | 3.0                 | 5.0            | 6.0            | 7.0            | 1.8   |
| Weight, kg                                                             | 1 000               | 1 300          | 1 400          | 1 500          | + 200 |
| Spreading quantity<br>salt, g/m <sup>2</sup><br>sand, g/m <sup>2</sup> | 5-30<br>50-200      | 5-30<br>50-200 | 5-30<br>50-200 | 5-30<br>50-200 | -30%  |
| Spreading breadth, m                                                   | 2-8                 | 2-8            | 2-8            | 2-8            |       |
| Hydraulic flow at<br>1 000 rpm<br>salt/sand, l/min                     | min 30/40<br>max 60 | 30/40<br>60    | 30/40<br>60    | 30/40<br>60    |       |
| Hydraulic pressure min. bar                                            | 150                 | 150            | 150            | 150            |       |
| Operating voltage, volts                                               | 12, 24              | 12, 24         | 12, 24         | 12, 24         |       |

Surface finish: Zinc metallized, primer and 2-component top coat.  
 Accessories: Remote controlled spreading configuration, moistening, mixer, hydraulic disc hoist, side jumpers, discharger, height extension frame, twin chambers, runner wheel or motor driven


# SOLUTION

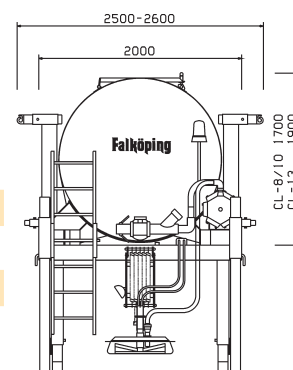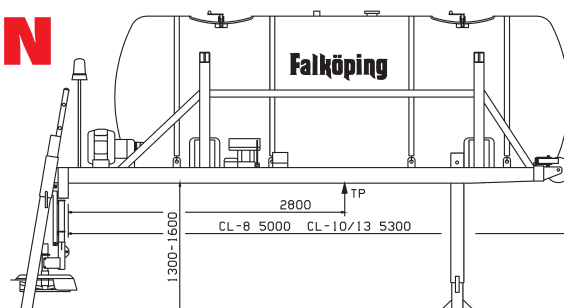


## Technical specifications CL-8 CL-10 CL-13

|                                                      |                  |                          |          |
|------------------------------------------------------|------------------|--------------------------|----------|
| Volume, m <sup>3</sup>                               | 8.0              | 10.0                     | 13.0     |
| Weight, kg                                           | 1 340            | 1 500                    | 1 880    |
| Spreading breadth, m                                 | 2-8              | 2-8                      | 2-8      |
| Spreading quantity, g/m <sup>2</sup>                 | 5-40             | 5-40                     | 5-40     |
|                                                      |                  | or max 320/metre of road |          |
| Spreading speed, km/hr                               | max 60           | 60                       | 60       |
| Hydraulic flow at<br>1 000 rpm<br>solution/salt, l/m | min 30<br>max 60 | 30<br>60                 | 30<br>60 |
| Hydraulic pressure min. bar 150                      | 150              | 150                      |          |
| Operating voltage, volts                             | 12, 24           | 12, 24                   | 12, 24   |


Surface finish: Zinc metallized, primer and 2-component top coat.  
 Accessories: Hydraulic loading system, remote controlled spreading configuration, side jumpers, disc hoist.

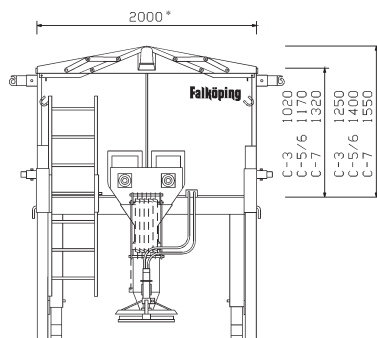

\* Exkl side jumpers. With side tanks 2350.

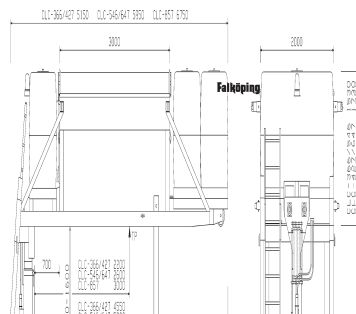

\* Long feed hose +300 mm



\* Exkl side jumpers

\* Exkl side jumpers

## Technical specifications C-06 C-1 C-1.5 C-2

|                             |        |        |        |        |
|-----------------------------|--------|--------|--------|--------|
| Volume, m <sup>3</sup>      | 0.6    | 1.0    | 1.5    | 2.0    |
| Weight, kg                  | 200    | 250    | 320    | 350    |
| Spreading quantity          |        |        |        |        |
| salt, g/m <sup>2</sup>      | 5-30   | 5-30   | 5-30   | 5-30   |
| sand, g/m <sup>2</sup>      | 50-200 | 50-200 | 50-200 | 50-200 |
| Spreading breadth           | 2-8    | 2-8    | 2-8    | 2-8    |
| Hydraulic flow at           |        |        |        |        |
| 1 000 rpm                   | min    | 20     | 20     | 20     |
| salt/sand, l/min            | max    | 60     | 60     | 60     |
| Hydraulic pressure min. bar | 150    | 150    | 150    | 150    |
| Operating voltage, volts    | 12,24  | 12, 24 | 12, 24 | 12,24  |

Surface finish:



Zinc metallized, primer and top coat.

Accessories:

Remote controlled spreading configuration, extended feed pipe + 300 mm, motor powered. Adjustable spreading breadth available for model C-06.



## COMBI plussolution

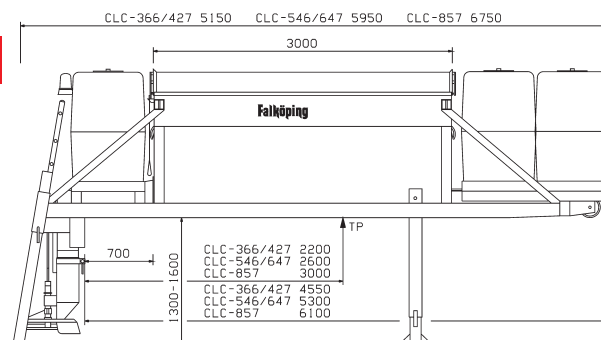

\* Exkl side jumpers

## Technical specification CLC-366 CLC-427 CLC-546 CLC-647 CLC-857

|                                      |          |        |        |        |        |        |
|--------------------------------------|----------|--------|--------|--------|--------|--------|
| Volume, m <sup>3</sup>               | solution | 3.6    | 4.2    | 5.4    | 6.4    | 8.5    |
|                                      | salt     | 6.0    | 7.0    | 6.0    | 7.0    | 7.0    |
| Weight, kg                           |          | 1 700  | 1 900  | 1 900  | 2 100  | 2 300  |
| Spreading breadth, m                 |          | 2-8    | 2-8    | 2-8    | 2-8    | 2-8    |
| Spreading quantity, g/m <sup>2</sup> |          |        |        |        |        |        |
| solution                             |          | 5-40   | 5-40   | 5-40   | 5-40   | 5-40   |
| salt                                 |          | 5-30   | 5-30   | 5-30   | 5-30   | 5-30   |
| Spreading speed, km/hr               | max      | 60     | 60     | 60     | 60     | 60     |
| Hydraulic flow at                    |          |        |        |        |        |        |
| 1 000 rpm                            | min      | 30     | 30     | 30     | 30     | 30     |
| solution/salt, l/min                 | max      | 60     | 60     | 60     | 60     | 60     |
| Hydraulic pressure min. bar          |          | 150    | 150    | 150    | 150    | 150    |
| Operating voltage, volts             |          | 12, 24 | 12, 24 | 12, 24 | 12, 24 | 12, 24 |

Surface finish:

Zinc metallized, primer and 2-component top coat.

Accessories:

Hydraulic loading system, remote controlled spreading configuration, side jumpers, disc hoist, mixer.

Modifications reserved.

Falköping

Technical specifications