

MANUAL SPREADER



SAND
SHINGLE
SALT
CALCIUM CHLORIDE

K-60

- ✓ Spreads sand, shingle, salt and calcium chloride
- ✓ Low centre of gravity for ease of handling
- ✓ Separate on/off control
- ✓ Spreads equally well moving backwards
- ✓ Can be used as a standard wheelbarrow



BUCKET SPREADER

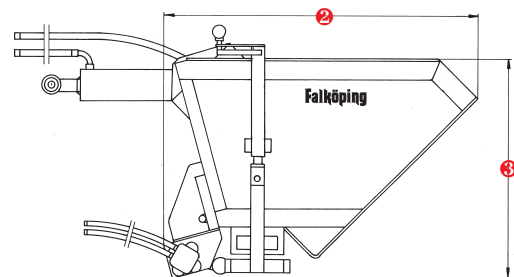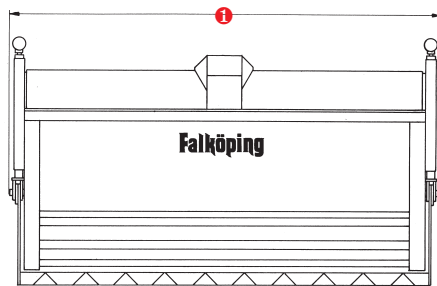

Technical spec	S-25LM	S-20LM	S-11LM	S-11 S-11T	S-8 S8-T	S-5	S-3
Volume, m ³	2.5	2.0	1.1	1.1	0.8	0.5	0.3
Weight, kg	650	575	340	340	265	220	190
Dimensions, mm	① 2630	2130	2130	2130	1630	1630	1130
	② 1550	1550	1200	1200	1200	1080	920
	③ 1180	1180	830	830	1200	710	710
Range, km - sand	9	9	5	5	5	3	3
Spreading width, m	2.5	2.0	2.0	2.0	1.5	1.5	1.0
Hydraulic flow l/min at 30 kph	20-130	20-130	20-130	20-40	20-40	20-40	10-20
Hydraulic pressure min, bar	100	100	100	100	100	100	100
Lifting power, min, kp	4400	3600	2100	2100	1800	1500	1000
Exterior finish:	Zinc metallised, primer and 2-component top coat						
Optional equipment:	Electrically heated outfeed table, Agitator, Hydraulic push rod (S3/S5), Electrical flow control						